



Indigo NXT Series iP0300 ice machine on D400 bin. Ice machine and bin sold separately.

### ICE SHAPES



▶ **Half-Dice:** 3/8" x 1 1/8" x 7/8"  
(0.95 x 2.86 x 2.22 cm)



▶ **Dice:** 7/8" x 7/8" x 7/8"  
(2.22 x 2.22 x 2.22 cm)

### SIZE

- ▶ Up to 325 lbs (147.4 kg) of daily ice production
- ▶ 30" (76.20 cm) wide, 34" (86.36 cm) deep, and 54.5" (138.43 cm) high including 6" (15.24 cm) legs
- ▶ 365 lb (165 kgs) ice bin storage capacity\*

\*Application capacity based on 90% volume x 33 lbs./ft<sup>3</sup> average density of ice

### SPECIFICATIONS

#### Refrigerant: R290

- ▶ Air-cooled: 3.53 oz (100 g)

#### BTU Per Hour

- ▶ 115V
  - 5,531 (average)
  - 6,142 (peak)
- ▶ 230V
  - 5070 (average)
  - 6016 (peak)

#### Operating Limits

- ▶ Ambient temperature range: 35° to 110°F (1.7° to 43.3°C)
- ▶ Water temperature range: 40° to 90°F (4.4° to 32.2°C)
- ▶ Water pressure ice maker (water in)
  - Min. 20 psi (137.9 kPa)
  - Max. 80 psi (551.1 kPa)

#### Power

- ▶ 115/60/1 and 230/60/1
- ▶ Minimum circuit ampacity:
  - Air-cooled, 115V: 9.0 Amps
  - Air-cooled, 230V: 4.9 Amps
- ▶ Maximum Fuse Size: 1
  - Air-cooled: 15 Amps (115V & 230V)
  - Water-cooled: 15 Amps (115V)

### FEATURES

- ▶ Sanitation
  - Hinged front door and removable components (water trough, tube, curtain, probe, pump) allow easy interior access and cleaning.
  - Select parts feature AlphaSan<sup>®</sup> antimicrobial protection.
  - DuraTech<sup>™</sup> exterior provides superior corrosion resistance compared to stainless steel. Innovative clear coat resists finger prints and dirt.
  - Optional LuminIce<sup>®</sup> Growth Inhibitor helps control bacteria and yeast, with status indicator on display.
- ▶ Sustainability & Value
  - R290 offers low global warming potential and zero ozone depletion.
  - Energy-efficient models (see EnergyStar.gov)
  - Icon-based easyTouch<sup>®</sup> display simplifies operation.
  - Acoustical probe and Active Sense help ensure consistent ice production.
  - 24-hour diagnostics support preventative maintenance.
  - Designed with programmable ice production to take advantage of off-peak rates and/or shut off over night to lower lifetime costs.\*
  - Connect via Bluetooth for quick setup and instant machine information.

\*Based on manufacturer assumptions without independent testing. Results may vary by settings and conditions.

### ACCESSORIES

- ▶ LuminIce<sup>®</sup> II virus and bacteria inhibitor helps control viruses and bacteria in the ice machine.
- ▶ iAuCS<sup>®</sup> schedules and performs routine ice machine descaling or sanitizing automatically.
- ▶ Arctic Pure<sup>®</sup> Pro water filters reduce sediments and chlorine contaminants down to 0.5 microns. For optimal performance, use the Arctic Pure prefilter in combination with the Arctic Pure primary filter.



LuminIce II



iAuCS



Arctic Pure Water Filters

# iP0300

## Manitowoc Ice Cube Machine

IYP0300A | IDP0300A

### INSTALLATION

Ice machine must be installed indoors.

Required clearance for

- top and sides: 16" (40.64 cm)
- back: 5" (12.7 cm)

**A** Electrical Entrance (2) Options

**B** 3/8" (0.95 cm) F.P.T.  
Ice Making Water Inlet


**C** 1/2" (1.27 cm) F.P.T.  
Ice Making Water Outlet

**D** 3/8" (0.95 cm) F.P.T.  
Water Condenser Inlet  
(water-cooled units)

**E** 1/2" (1.27 cm) F.P.T.  
Water Condenser Outlet  
(water-cooled units)

**F** 3/4" (1.91 cm)  
Bin Drain

Not shown: 1/2" (1.27 cm)  
Auxiliary Base Drain Socket

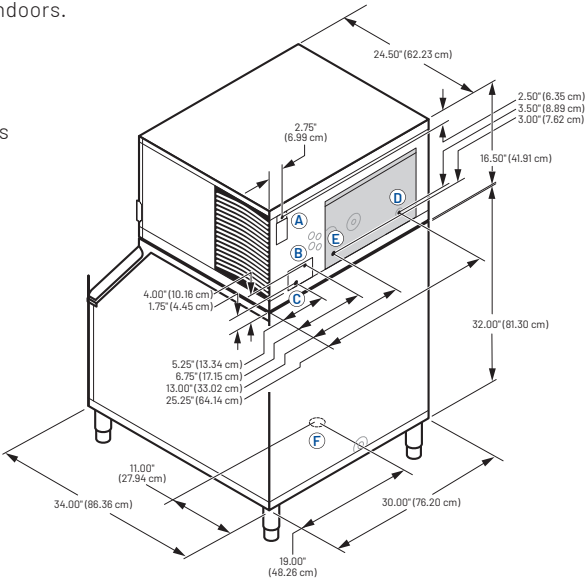

iP0300 on D400 Bin

### SPACE-SAVING DESIGN



iP0300  
D400

|             |                     |
|-------------|---------------------|
| Height      | 54.50"<br>138.43 cm |
| Width       | 30.0"<br>76.2 cm    |
| Depth       | 34.0"<br>86.36 cm   |
| Bin Storage | 365 lbs<br>165 kgs  |

Height includes adjustable bin legs  
6.00" to 8.00", (15.24 to 20.32 cm)  
set at 6.00" (15.24 cm).  
Bin capacity is based on 90% of the  
volume x 33 lbs/ft<sup>3</sup> average density of ice.  
Ice machine and bin sold separately.

### SPECIFICATIONS

|                 |  |          |           |                      |                                        | @ 90° Air/70°F Water (32° Air/21°C Water) |                                          |                                                       |                                             |
|-----------------|--|----------|-----------|----------------------|----------------------------------------|-------------------------------------------|------------------------------------------|-------------------------------------------------------|---------------------------------------------|
|                 |  | Model    | Ice Shape | Shipping Weight      | Ice Production 24 Hours                |                                           | Power Usage<br>kWh per<br>100 lbs of ice | Ice Machine<br>Potable water usage<br>per 100 lbs ice | Condenser<br>water usage<br>per 100 lbs ice |
|                 |  |          |           |                      | 70°Air/50°F Water<br>21°Air/10°C Water | 90°Air/70°F Water<br>32°Air/21°C Water    |                                          |                                                       |                                             |
| Air<br>Cooled   |  | IYP0300A | Half Dice | 131.3 lbs (59.6 kgs) | 325 lbs (147.4 kgs)                    | 246 lbs (111.5 kgs)                       | 6.37 ★                                   | 16.4 Gal (62.1 L)                                     | N/A                                         |
|                 |  | IDP0300A | Dice      | 131.3 lbs (59.6 kgs) | 309 lbs (140.2 kgs)                    | 257 lbs (116.8 kgs)                       | 6.58                                     | 16.4 Gal (62.1 L)                                     | N/A                                         |
| Water<br>Cooled |  | IYP0300W | Half Dice | 129.3 lbs (58.7 kgs) | 308 lbs (139.7 kgs)                    | 261 lbs (118.4 kgs)                       | 5.4                                      | 15.6 Gal (59.1 L)                                     | 145 Gal (548.9 L)                           |
|                 |  | IDP0300W | Dice      | 129.3 lbs (58.7 kgs) | 309 lbs (140.2 kgs)                    | 260 lbs (117.9 kgs)                       | 5.5                                      | 16.8 Gal (63.6 L)                                     | 145 Gal (548.9 L)                           |

R290 is a refrigerant grade propane which is naturally occurring with no ozone depletion potential and extremely low global warming potential.

#### Limited Commercial Warranty

- Ice Maker** Three (3) years parts and labor
- Evaporator** Five (5) years parts and labor
- Compressor** Five (5) years parts, three (3) years labor



2110 South 26th Street | Manitowoc, WI 54220 | United States  
+1.920.682.0161 | 920.683.7589 Fax | [manitowocice.com](http://manitowocice.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. ©2025 Pentair. All rights reserved.